



Underfloor heating and liquid floor screed



The underfloor heating specialists...

Planning and Design

We are dedicated to providing our clients with the very best in underfloor heating systems, together with customer care above and beyond expectations. Our experienced consultants are dedicated to investing their time in planning and designing your underfloor heating system, ensuring that you are supplied with an underfloor system of the very highest standard. Good advice and quality products go hand in hand and this ensures that you get the best possible results from your heating system.

Our FREE planning and design service includes:

- Full CAD design service produced from your Architect's Plan, this is bespoke to your project and should not be confused with a schematic drawing. This will include full pipe layout, heat loss calculations, manifold locations, technical data and pump information duties.
- Planning and design can take place with limited impact on your time. In many cases a site visit isn't necessary, unless the project installation is particularly detailed. In the first instance most questions can be talked through over the telephone, and only then if necessary, would a site visit be arranged at cost, which is deducted from the total invoice amount once an order is placed.
- Our technical team of consultants have many years of experience within the underfloor heating industry and are competent in project managing a wide range of commercial, trade and residential heating and screeding projects.

Installation and Workmanship Guarantee

Our team of friendly, specialist, underfloor heating engineers, are on-hand to install and test your new system. Once your underfloor heating system is installed, you will be provided with a Workmanship Guarantee Certificate. Our guarantee means that your system will be our responsibility for 2 Years from installation date. In the rare chance that any defects occur as a result of our installation process, the certificate will cover call out charges and labour costs that would have normally been incurred.

Free Commissioning

We offer a free commission visit with every installation of UFH and screed, this ensures that your system is balanced, set correctly, and working at optimum temperatures. Maximising heat outputs and minimising energy consumption, our heating engineer will also spend time with the homeowner or designated operator to familiarise them with all of the controls and thermostats and to ensure that they are comfortable with using the system correctly. We recommend a yearly service and commission to ensure the smooth running of the UFH system, a reminder will be sent automatically when this is due.

50 Year Underfloor Heating Pipework Warranty

All products that we supply are of the highest standards and have the assurance of the German pipe manufacturer's guarantee directly with the manufacturer, this is unique to our company in the UK.



Environmentally Green Systems

As a company our ethos has always been to be as green as possible, we take this very seriously and have improved our heating systems to reflect this by using cutting edge technology and always striving to develop and educate our staff on the latest build principles. Building and designing energy efficient systems within homes and businesses has become a way of life, and this in turn saves money and the planet we all live in today and for future generations. In most cases our customers have found that our systems have paid for themselves in a little as 2 years through energy savings. With new legislation pending and Government incentives such as the Green Deal it makes sense that there is an underfloor heating system available for every project application. From new build to refurbishment, from Church to Barn and shopping centre all projects are readily acceptable for underfloor heating.

Green credentials:


- 98% Recycled Liquid Flow Screed, utilising products that would normally have gone to waste and landfill we supply a reduced thickness screed, normally around 50mm. This creates an excellent thermal conductivity of over 30% above a sand and cement screed, which means it's more responsive, warms up and cools down quicker and gives a much better control over and above using a sand and cement screed. Therefore saving you money on operating costs and reducing your fuel consumption.
- We offer 100% recycled tray panel that UFH pipework can sit into, this is made from off cuts of surplus manufacturing products, which are ground down and moulded into trays, some of which are now being mixed with thermo activating products.

- Our packaging and waste products are recycled downstream into useful items, for example our surplus or scrap pipework is recycled into garden furniture and other miscellaneous items.

Dedicated Consultant – every step of the way

All of our clients are given a complete one to one service and a dedicated consultant to 'hold their hand' through the process of purchasing their underfloor heating system. Working through the Architects technical plans, to pre-installation and post-installation stages, our consultants spend as much time that is required to ensure that the client is completely comfortable and fully understands the system they are purchasing. During the pre-installation and post-installation stage our consultant will liaise with other contractors who may be working on the client's project to ensure that our part of the process runs as smoothly as possible and timelines are met.

...the EasyFlow service

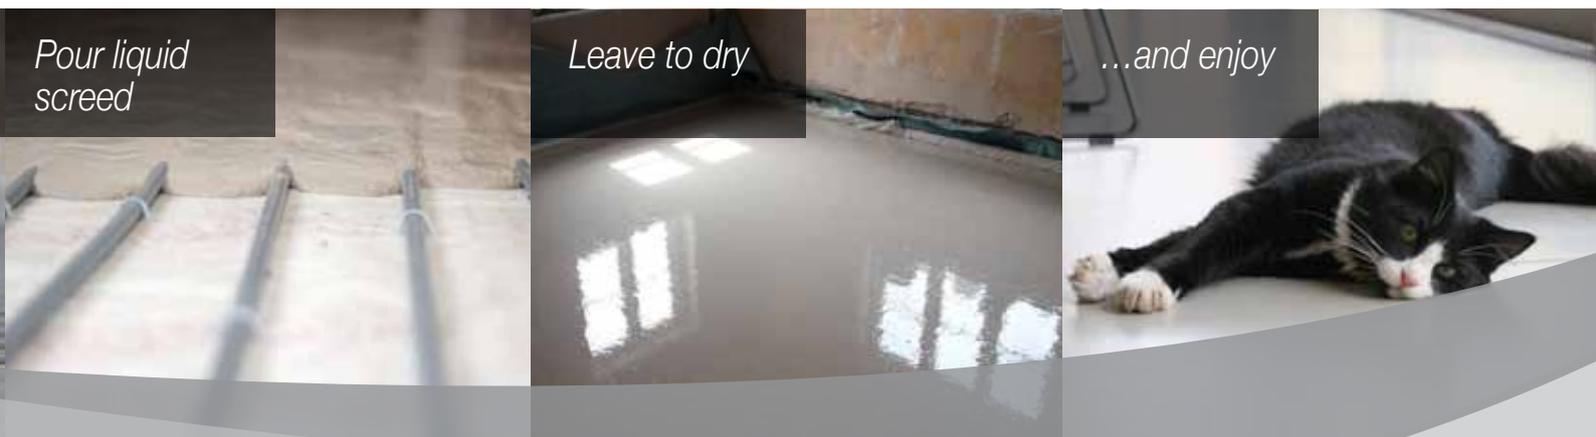


Our underfloor heating systems



Easy Standard

Easy Standard floors are probably the most popular of all the floor constructions that we supply underfloor heating systems for. They are essentially systems where pipes carry warm water through the floor while encased within 50mm screed.

These systems traditionally tend to be used with a sand cement screed, however modern liquid screeds can make the installation quicker and improve the thermal output of the system.

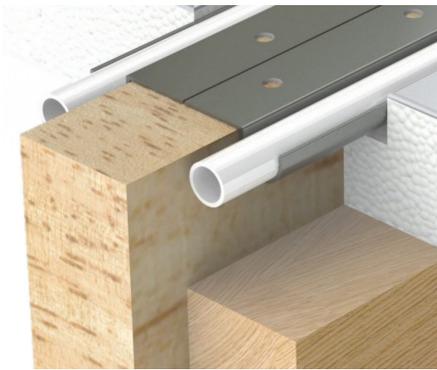

Easy Joist

The Easy Joist system can be used in a variety of installation scenarios. The most common tend to be on first floors in new builds or renovations of older buildings. As it is a very lightweight system it is suitable for most joist types. These systems have no thermal mass like a solid floor and rely on heat spreader plates to help distribute the heat. This means they are very fast acting and heat up very quickly, even from cold.



Easy Panel

The Easy Panel system is available in a solid floor panel or floating floor panel to suit your application. The underfloor pipes sit inside pre-cut grooves within the floor panel and are then covered with a thin layer of leveling compound or liquid screed. These panels should be used on projects where there is limited build up height available.

...the EasyFlow service

Pump application

Self-levelling

The perfect finish!



Liquid floor screed




Why Anyhydrite Liquid Floor Screeds?


Anyhydrite flowing floor screeds are based on a synthetic anhydrite binder rather than OPC Cement giving them many unique benefits over cement screeds, the most obvious difference is their fluid application compared to semi dry cement screeds, but they also offer higher compressive and flexural strength, lower shrinkage, eliminate reinforcement, improve surface finish and greatly improved underfloor heating performance.

Anyhydrite screeds achieve this by offering higher thermal conductivity and reducing cover to the heating pipes, greatly improving the heat performance and reaction times of the screed, this allows for a more reactive system requiring a smaller amount of energy input. The system temperature is easier to regulate due to its responsive nature allowing the building to achieve a constant temperature without the variability and thermal over shoot associated with thicker section sand cements and concretes.

Information below generated using screed samples over heat plates for comparative testing, it is not representative of an UFH system due to input temperatures.

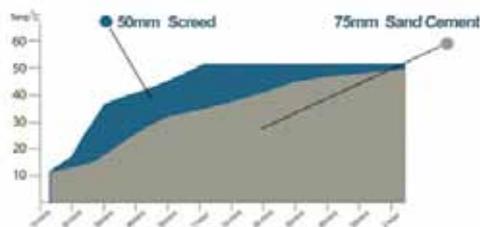

Heating Performance

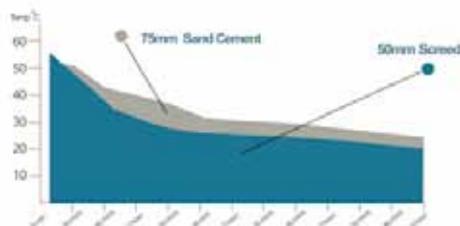

Cooling Performance

Environmental

The Environmental benefits of Anyhydrite can be broken down to material sourcing, manufacturing energy consumption, material delivery and material usage on site.

Material Sourcing /Recallability

Anyhydrite binder is manufactured from a synthetic anhydrite which is a by product of the chemical industry. Prior to the material being used for floor screed binder it could've gone to landfill or have been disposed of in the Fjords of Norway. Anyhydrite utilise approx 980kg of synthetic anhydrite per tonne of binder, compared to the 1.6 tonne of raw material required to produce a tonne of cement. Meaning each 1000m² of Anyhydrite installed reduces landfill by 34 tonne. In addition to an increased recycled content in construction Anyhydrite screeds are also 100% recyclable at the end of the buildings life cycle.

Energy Consumption

Since Anyhydrite's manufacturing process doesn't require the kiln burning phase associated with cement production there is a considerable energy saving per tonne. Cement is kiln burnt at around 1450 degrees during it manufacture were as Anyhydrite is not subjected to heat other than that created during the milling process.

Material Delivery

Anyhydrite binder is delivered from our production facility to readymix plants, transmix delivery units and bagging facilities where it is silo stored ready to be converted to screed mortar or pre blended bagged material as required. The eliminates the generation of unnecessary amounts of waste packing and the associated environmental impact.

Material Usage

All of Anyhydrite's screed and system solutions benefit from higher flexural and compressive strengths than you'd expect from sand cement, meaning the total screed depth can be greatly reduced offering up to a 40% saving in the raw material required and delivery truck movements.


Delivered to your door



Ideal for underfloor heating



Thickness down to 30mm

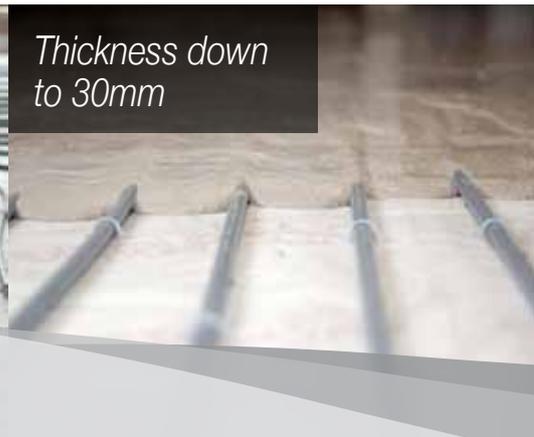

Liquid screed options

Easyflow Screed is a floor screeding service using innovative, pumped liquid screeds.

It provides fast, efficient and precise floor covering. It is ideal to underfloor heating as the screed flows around the pipes forming a void free finish. No voids means greater conductivity - allowing the heat to diffuse evenly in the screed.

Best for underfloor heating....

If you're looking for a screed to perfectly compliment your underfloor heating system then an anhydrite liquid screed is the place to start. Various options are available to give extra strength for shallower applications or guaranteed improved thermal performance.

Anhydrite flowing screed is a blend of a binder, special additives and selected aggregates mixed with clean potable water to produce a pumpable self smoothing, flowing screed.

Anhydrite flowing screed is designed to provide a smooth level surface in both commercial and domestic buildings prior to the application of floor finishes. It can be used bonded, unbonded or floating and with or without underfloor heating.

Following installation this screed will be ready for foot traffic after 24-48 hours and can be loaded after 7 days.

A higher thermal conductivity option of this screed is also available offering a manufacturer's guarantee certificate that the performance of your underfloor heating will be improved.

Time is of the essence

If time constraints are the biggest concern on your build, Easyflow can offer a range of fast-drying cement-based liquid floor screeds which offer drying times from 10 to 21 days dependent on your final floor finish.


Since these screed are cement based floor coverings can be applied much faster than calcium sulphate screeds which require a final moisture content of 0.5% whereas fast-drying options can be tiled at a final moisture content of 5% and timber floors can be installed at a final moisture content of 2.8%, speeding up the entire build process.

Best for extra strength and higher depths

When dealing with depths in excess of 75mm or for garage floors Easyflow are able to recommend the use of a cement based liquid floor screed which can be pumped applied and laser leveled for a precise floor finish.

Topflow Horizontal's finishing characteristics and high quality surface finish can eliminate the need to power float concrete on site dependent on project specification.

Topflow can be used in slabs, residential dwelling oversite/slabs, structural toppings, domestic floors, commercial slabs such as composite deck construction (rib metal decking), low traffic industrial floor slabs, mezzanine and office areas within industrial units.

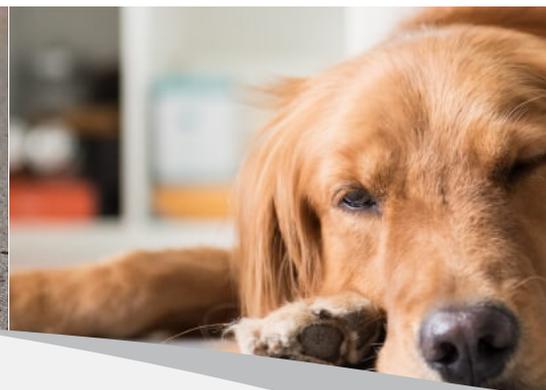

Case Study

Renovation

Shrewsbury, Shropshire

Lenny the Lion contacted Easyflow to design a bespoke system for his house close to his beloved New Meadow, the home of Shrewsbury Football Club in Shropshire.

Our UFH Consultant visited Lenny at his den to go through his requirements and to get a better understanding of the scope of works.

We were then able to carry out heat loss calculations for every individual room and design a system that would work perfectly for him.

Easyflow designed the project using the Easy Standard system with extra clip rails in one zone due to a difference in insulation types used by the client.


The screed was pumped and installed the following day, with a little help!



Lenny the Lion's project was a roaring success!

For more case studies visit:

www.easyflow.org.uk/category/case-study

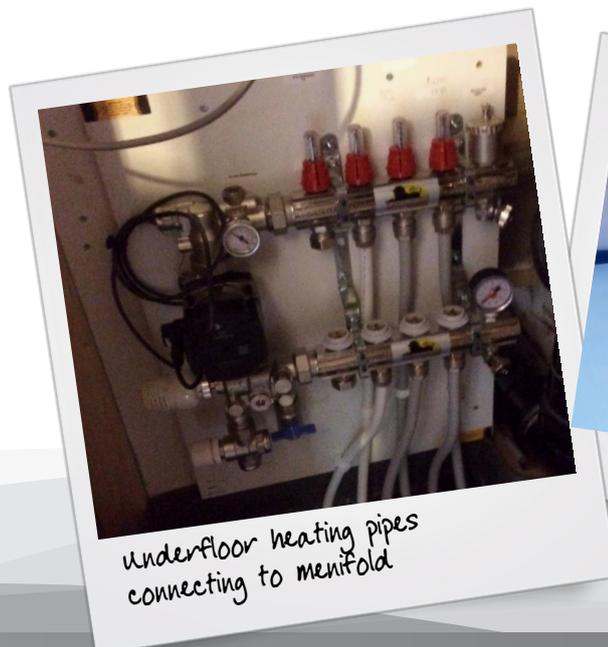

underfloor heating pipes connecting to manifold



50mm liquid floor screed

Testimonial


I would be more than happy for you to use any of the photos of me doing all the work whilst the Easyflow team sat down drank coffee cups of tea and ate sandwiches and of course they posed for photos making out that they at least turned up to watch a lion in action.

The work was a blessing in disguise as we had only just spent an absolute fortune on converting the house using thermal underflooring and timber topping. After having a burst water pipe we decided that we would definitely not go down that route again we had to start all over again luckily a friend recommended that I should go and speak to Easyflow they made me feel very welcome and they were very sympathetic to our problems the team came out and did a full survey before recommending a way for us to go we decided to go down the route of having underfloor heating with the Easyflow finish.

I only wished we had gone this way first time it would have saved us all the problems and headaches but we had to go through.

We had an excellent team of workers that were professional in their manner and in the way they went about the work we now have a beautifully finished flooring and the house is warm and toasty ready for winter.

Again we would like to thank the Easyflow team for all their work and making our home a home again.

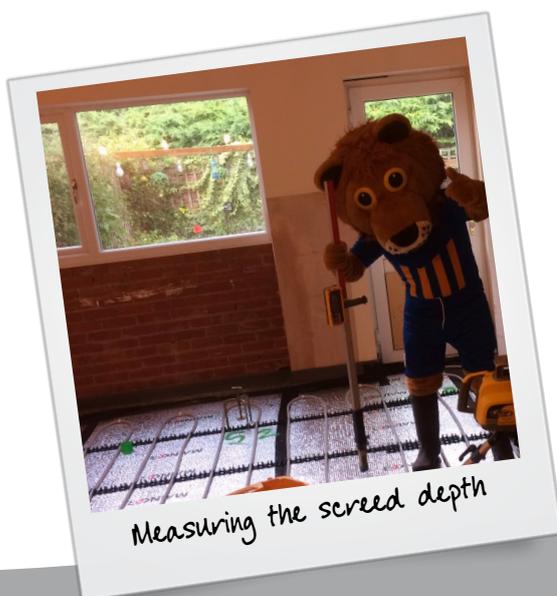

Nationally...
we've got it covered.



For advice or a FREE consultation:

01743 343000

Unit 38e Vanguard Way
Battlefield Enterprise Park | Shrewsbury
| SY1 3TG

email sales@easyflow.org.uk
www.easyflow.org.uk

